




MBA Electric Steam Generator Specifications

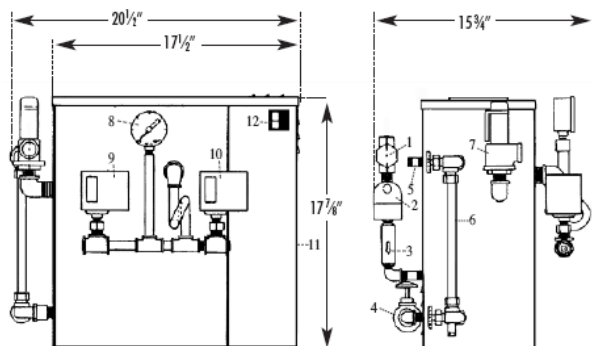

1. All units are physically identical and have a packed shipping weight of 125 lbs.
2. Units are trimmed at 100PSIG as standard. 15PSIG trim also available.
3. Incoming water line pressure must be 10 PSIG greater than generator operating pressure. If not, a motor/pump must be used. Specify Sussman MBA38002A high pressure water feed motor/pump system.
4. When ordering specify Model No., KW, Volts/PH and motor/pump if required.
5. Water Connection is 1/4 NPT. Steam outlet is 1/2 NPT.

DIMENSIONAL INFORMATION

SYMBOL	INCHES
A	20 1/2
B	17 1/2
C	17 7/8
D	15 3/4

MODEL	KW	VOLTS	PH	AMPS	PPH
MBA3	3	120, 208, 240	1	25, 15, 13	9
MBA6	6	208, 240, 480	3	17, 15, 8	18
MBA9	9	208, 240, 480	3	25, 22, 11	27
MBA12	12	208, 240, 480	3	34, 29, 15	36
MBA18	18	208, 240, 480	3	50, 44, 22	54
MBA20	20	208, 240, 480	3	56, 49, 25	60

SYMBOL	DESCRIPTION
1	STRAINER
2	WATER SOLENOID
3	CHECK VALVE
4	DRAIN VALVE
5	STEAM OUTLET
6	GAUGE GLASS ASSEMBLY
7	SAFETY VALVE
8	PRESSURE GAUGE
9	HI-LIMIT PRESSURE CONTROL
10	OPERATING PRESSURE CONTROL
11	ACCESS PANEL
12	ON/OFF SWITCH