




SSB Electric Steam Boilers: Specifications

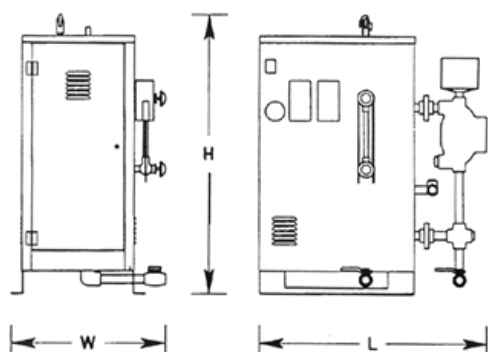

*Single phase available.
 #Other voltages available.
 ##With 50°F feedwater.

NOTE:

- All wetted metal parts are stainless steel. Consult Factory for specific wetted parts materials.
- Allow 21 inches for heating element removal When ordering: specify model number, KW, volts, phase and optional equipment.
- Minimum of 1 meg ohm-cm specific resistivity feed water must be used for proper & safe boiler operation.

BOILER MODEL	KW	BHP	LBS. STEAM /HR.##	3 PHASE VOLTAGE #	TOTAL AMPERAGE	INCHES W L H	SHIP WT.
SSB-12*	12	1.22	36.2	208	34	20 28 36	260
				240	29		
				480	15		
SSB-18*	18	1.84	54.2	208	50	20 28 36	270
				240	44		
				480	22		
SSB-24*	24	2.45	72.3	208	67	27 33 45	330
				240	58		
				480	29		
SSB-30*	30	3.06	90.4	208	84	27 33 45	340
				240	73		
				480	37		
SSB-36*	36	3.67	108	208	100	27 33 45	350
				240	87		
				480	44		
SSB-48	48	4.89	145	208	128	27 33 45	365
				240	111		
				480	56		
SSB-60	60	6.12	181	208	167	27 33 45	410
				240	145		
				480	73		
SSB-72	72	7.35	217	208	200	27 33 45	420
				240	174		
				480	87		
SSB-100	108	11.0	325	208	284	28 34 59	675
				240	246		
				480	123		
SSB-135	144	14.6	433	208	400	30 36 61	785
				240	347		
				480	173		
SSB-160	158	161	475	240	379	30 36 61	785
				480	190		
SSB-180	180	18.4	542	240	434	30 36 61	790
				480	217		